

**KALEA**

# A4 PRIMO



**KALEA**   
LIFTS

NEXT LEVEL

# Kalea A4 Primo


– a cost effective solution

**THE KALEA A4 PRIMO** has been developed with the main focus on aesthetic and engineering expertise. The result is a lift that combines new sleek design with the latest technology. Smart elegance, attractive pricing and great choice of options make the A4 platform lift the perfect accessibility solution for most indoor and outdoor environment. Everything is designed for easy usage making the lift safe and practical.

**THE A4 PRIMO** is a screw-driven platform lift with a self supporting prefabricated shaft and built in guide rail. The A4 Primo requires no pit and has an integrated machine room, which means minimal construction work and swift installation. In most cases, two trained lift technicians will build a two level lift within two days. Designed to integrate elegance, comfort and safety, it comes in two different platform sizes and provides a variety of options in terms of materials, colours and safety.

**THE A4 PRIMO** is EC-type tested and certified by the Notified Body DNV, Det Norske Veritas, according to the European Machinery Directive 2006/42/EC and the forthcoming European Standard for platform lifts.

TECHNICAL INFORMATION - KALEA A4 PRIMO	
Rated Load	400 kg and 500 kg
Travel speed (m/s)	max 0,15 m/sec (9 m/min)
Travel height	max 13 m (max 6 landings)
Platform sizes	1000x1500 / 1100x1500 / 1100x1630 (IWx L, mm)
Cut out sizes	1400x1630 / 1500x1630 / 1500x1760 (IWx L, mm)*
Shaft	Steel panels finished in traffic white RAL 9016
Pit	50 mm alt ramp
Door configuration	Single entry, open through, adjacent
Doors	Single hinged doors. Steel door fronts finished traffic white RAL 9016. Aluminium door fronts made in natural anodized aluminium. Fire and gas resistant doors EI60
Clear door opening sizes	900x2000 mm (wxh)
Clear door opening s.Gate	900x1 100 mm (travel <3 m)
Control system	Micro computer based
Power supply	400 V, 3-phase 50/60 Hz, 16 A starting current
- Rated load 400 kg	Soft start and stop as option: 220-240 V 1-phase frequency converter
"- 400 and 500 kg	380-400 V 3-phase frequency converter
Motor power	2,2 kW
Options	Telephones, locking systems, concealed automatic dooropeners, elbow buttons, fold-down seat, emergency battery lowering, IR-control, automatic shaft lighting, arrival bells, level indicator, Smart Card
Directives and Norms 2006/42/EC and the standard EN 81-41	

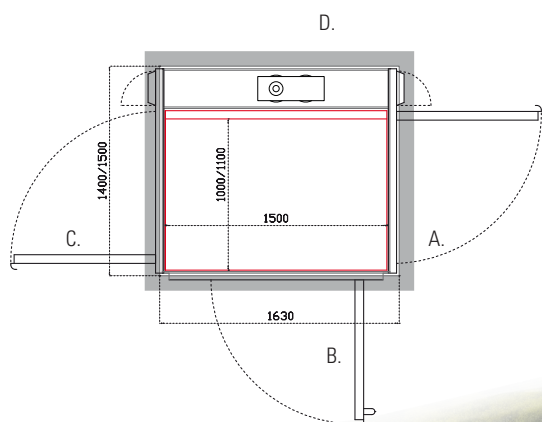

P\_K-A4PRIMO\_GB.13.05 We reserve the right to product alterations. © Kalea Lifts 2013

KALEA A4 PRIMO

**Kalea Lifts**

[www.kalealifts.com](http://www.kalealifts.com)  
[info@kalea.se](mailto:info@kalea.se)

